

===== **Headline**

IBM Watson =====

**Integrate voxibot with chatbot:**

In next steps we illustrate how to integrate with Watson engine which is the same way for other engines, just changing some credentials to validate whatever your engine is.

**Our chatbot here will be based on Watson**

First of all, create an account for Watson engine to get some credential that we need to set and connect between voxibot and chatbot engine, click here to create your account

<https://watson-conversation.ng.bluemix.net/login> ,

**When you succeed to create an account next step is to create a workspace with your account and next create the first chatbot to test your system**

1. After you log in, click on proceed to start.

About your IBMid Account Privacy

This notice provides information about accessing your IBMid user account (Account). If you have previously been presented with a version of this notice, please refer to "Changes since the previous version of this notice" below for information about the new updates.

+ Changes since the previous version of this notice

+ What data does IBM collect?

+ Why IBM needs your data

+ How your data was obtained

+ How IBM uses your data

+ How IBM protects your data

+ How long we keep your data

Your rights


Our Privacy Statement provides more information about your personal data rights. It also provides contact information if you have questions or concerns regarding our handling of your personal data.

Acknowledgement


I acknowledge that I understand how IBM is using my Basic Personal Data and I am at least 16 years of age.




2. We need to find a proper tool to build our chatbot, go to Dashboard on left the choose Watson in the bottom.

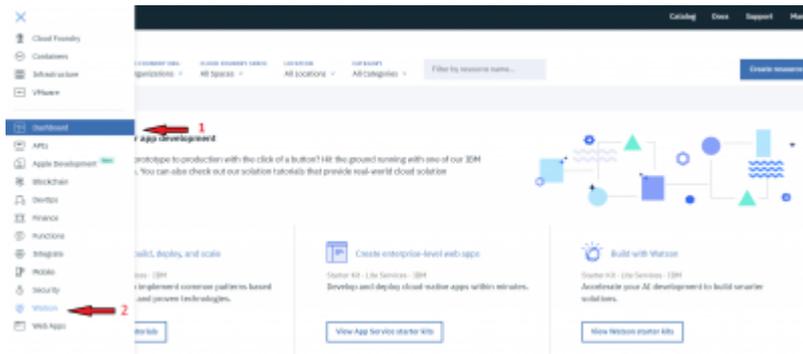

3. Here as you see click **Get Start** to launch your own chatbot.

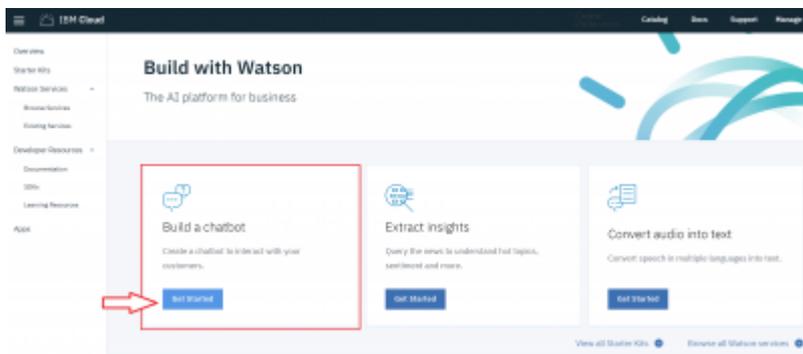


4. We will use Lite option in our example it is limited and it has 30 days to keep your work up. On right bottom click on Create.

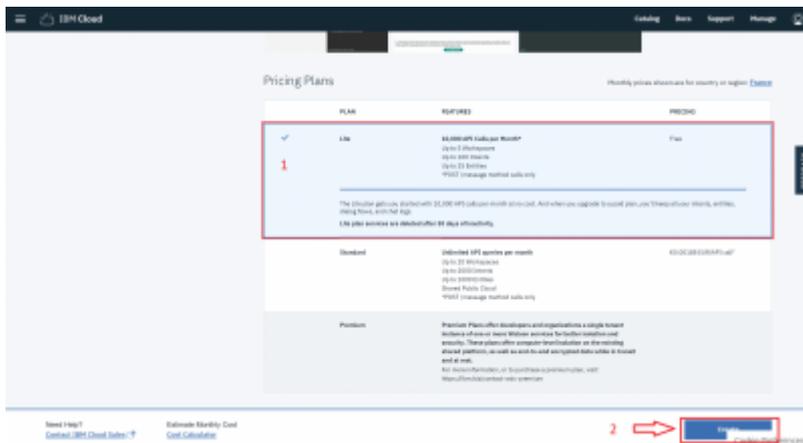

5. Before you launch the platform, have a look to your credential.copy your credential Username/password and paste them on proper places in Root.vxml file (you can see at the end of this Doc). After that press on Launch test.



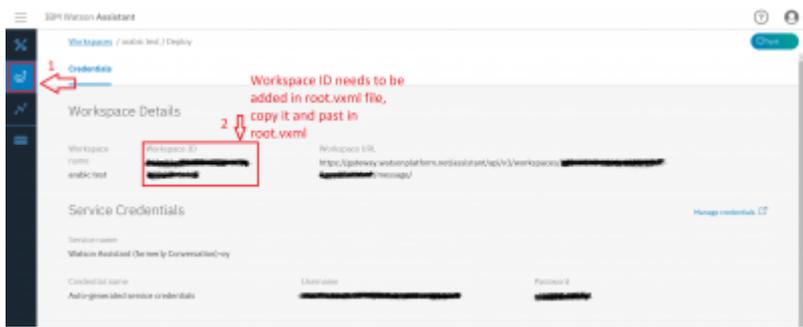

9. The way to set the rules in chatbot is same for any language, so you can follow Watson documentation on this website <https://www.ibm.com/blogs/nordic-msp/get-started-building-chatbots-using-watson-bluemix/>


## Now form voxibot side:

In this side we need to adapt our watson credential in easy way inside Voxibot, then by finishing these next steps we will be able to talk to our chatbot thanks to voximal voice assistant. **Note**, We deal with Arabic language as we will see.


### Let's start step by step

**Note** : Each step you edit or add something new you should do save/submit the apply config


1. To start configuring our voxibot firstly, go to **settings** then **voximal settings** to adjust our settings.

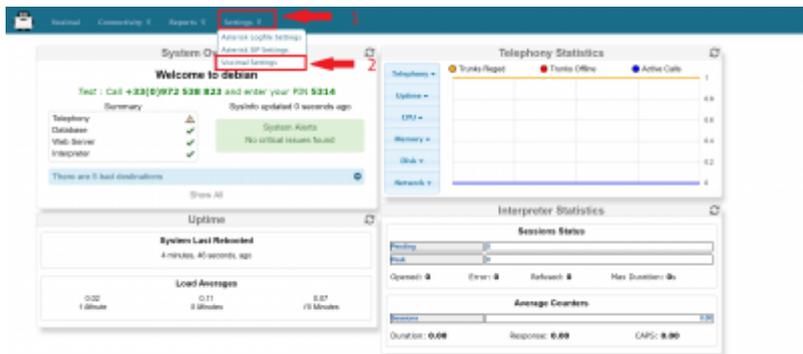


2. As shown below choose your API, in our case **HTTP or MRCP** which easy and support Arabic. Just copy and paste the link in **URI** <http://tts6.i6net.org/tts/acapela/tts.php>. **Pay attention** to format (alaw), save and apply config after finishing.

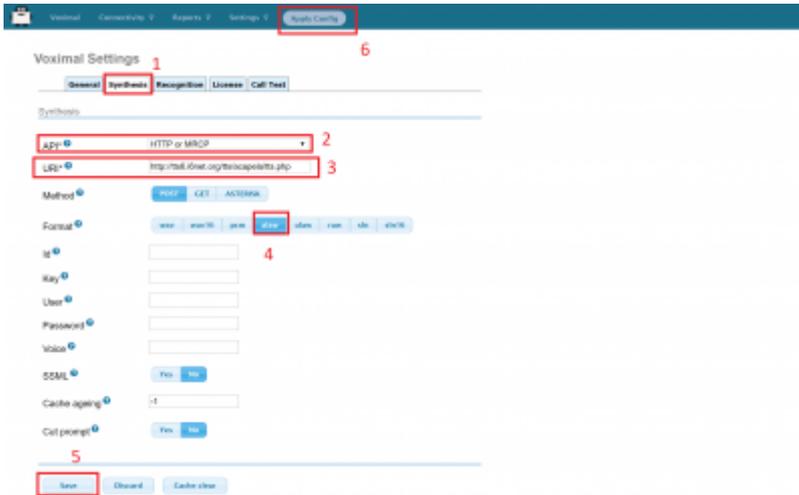

3. We need API recognition engine to print out and translate our input as a text to be understood by the chatbot. You need to have a credential key for Google or your favorite provider. There are other engines can provide recognition features that depend on the quality and the language support.

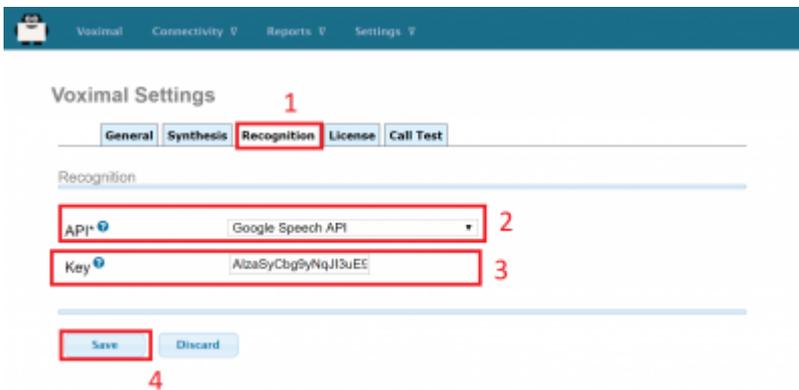


4. Create an account to assign it to a Number, this account will connect to the database to communicate with the chatbot, **URL** is the source where our essentials file located. set the speech to **Automatic** to avoid any issues,

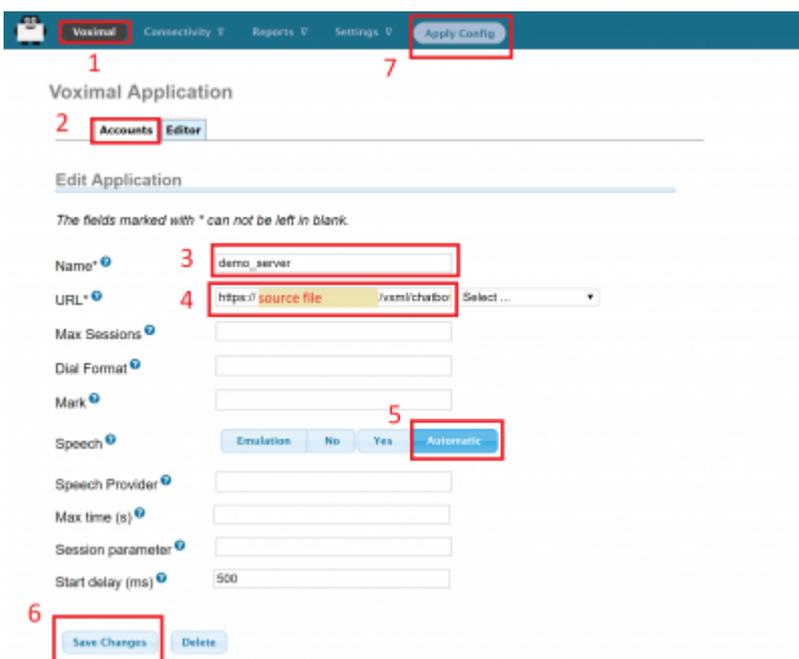

5. Set a call number to our account that just created, give it any number and name, the important

part here is to set **destination**. it will be **voximal application** and link it to the account name that should appear on the list because we just made it **\*\*(demo\_server)\*\***

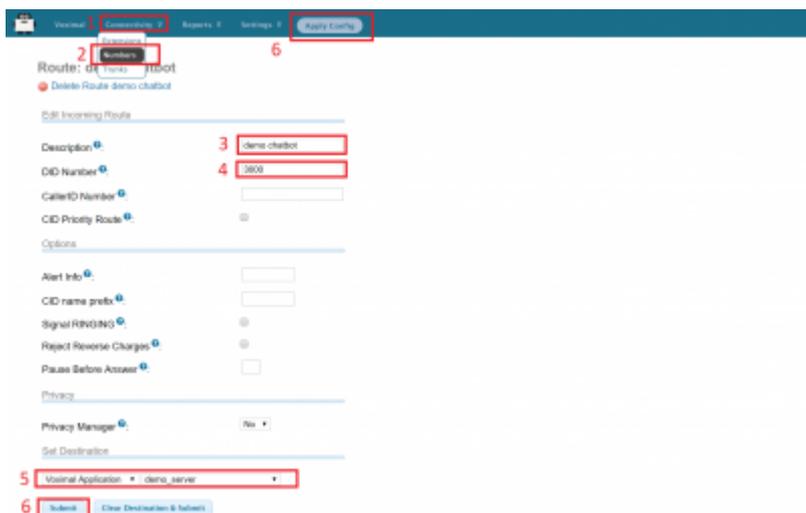

**6.** There are two files need to adapt to our case **root.vxml** and **conversation\_watson.vxml** For the root file set the language that you want and supported by the provider (engine). also Because we use Watson so our credential will be Watson credential, we explain how to get these credential from Watson in the top of this page. in addition, By setting your email address you can have the results of your calls and your communication logs with the chatbot.



**7.** In **conversation\_watson** put the language as you configure in root file. This depends on which workspace ID you want to communicate with.

```

1 <!-- session = "1.1" -->
2 <!-- note: change 1.1 in this line language en, en-GB, en-UK, en-US, or regarding what is the IBM provider -->
3 <!-- session = "2.1" --> <!-- http://www.ibm.com/2801/vxml? application=watson.vxml --> <!-- session="en" -->
4 <var name="start" expr="true"/>
5
6 <var name="prompt" expr=""/>
7
8 <var name="url_to_invoke" expr=""/>
9 <var name="url_args" expr=""/>
10 <var name="url_result" expr=""/>
11
12 <script>
13 var context = 1 conversation_id= id1
14 var input = { text: '' };
15 </script>
16
17 <var name="answer" expr="VIDE" />
18 <var name="sessionId" expr="session.connection.remote.uri"/>
19
20 <form id="main">
21 <!-- Init for Watson -->
22 <block cond="start">
23 <assign name="input.text" expr="REID"/>
24 <log MATSON : input: <value expr="input"/> context: <value expr="context"/> </log>
25 <data name="api" srcexpr="https://gateway.watsonplatform.net/conversation/api/v1/workspaces/'workspace'" />
26 <log MATSON : result: <value expr="api"/> </log>
27 <assign name="start" expr="false"/>
28 <assign name="prompt" expr=""/>
29 <foreach item="text" array="api.output.text">
30 <assign name="prompt" expr="prompt+text"/>
31 </foreach>
32 <script>log("Watson (init): " + prompt) </script>
33 </block>
34
35 <!-- Get the user input -->
36 <field cond="true" name = "text">
37 <property name="timeout" value="15s"/>
38 <property name="compleatetimeout" value="700ms"/>
39 <property name="interdigittimeout" value="100ms"/>
40 <property name="sensitivity" value="0.9"/>
41 <grammar srcexpr="builtin:grammar/text'+lang'"/>
42 <grammar srcexpr="alias'+lang'+.grxml"/>
43 <grammar srcexpr="phrase'+lang'+.txt"/>
44 <prompt cond="lang="fr" --> <!-- lang="fr" --> <value expr="prompt"/> </prompt>

```

From: <https://wiki.voximal.com/> - **Voximal documentation**

Permanent link: [https://wiki.voximal.com/doku.php?id=developer\\_guide:connect\\_your\\_chatbot:watson:start&rev=152775339](https://wiki.voximal.com/doku.php?id=developer_guide:connect_your_chatbot:watson:start&rev=152775339)

Last update: **2018/05/31 14:02**

