

Soft Phone connection

Set up a software telephone so that you can play with Voximal. We recommend Zoiper or YateClient which are free. Download them from :


- [laxLite](#) (old windows application)
- <https://www.zoiper.com/en/voip-softphone/download/zoiper-classic/for/windows> (freeware with commercial offer)
- [YateClient](#) (opensource freeware)

Account datas :

- username : user
- password : (get it form the Voximal/Settings/Test)
- server : (the IP adress of your server)

Get your password from the Web Interface

Select Setting → Voximal Setting → Test

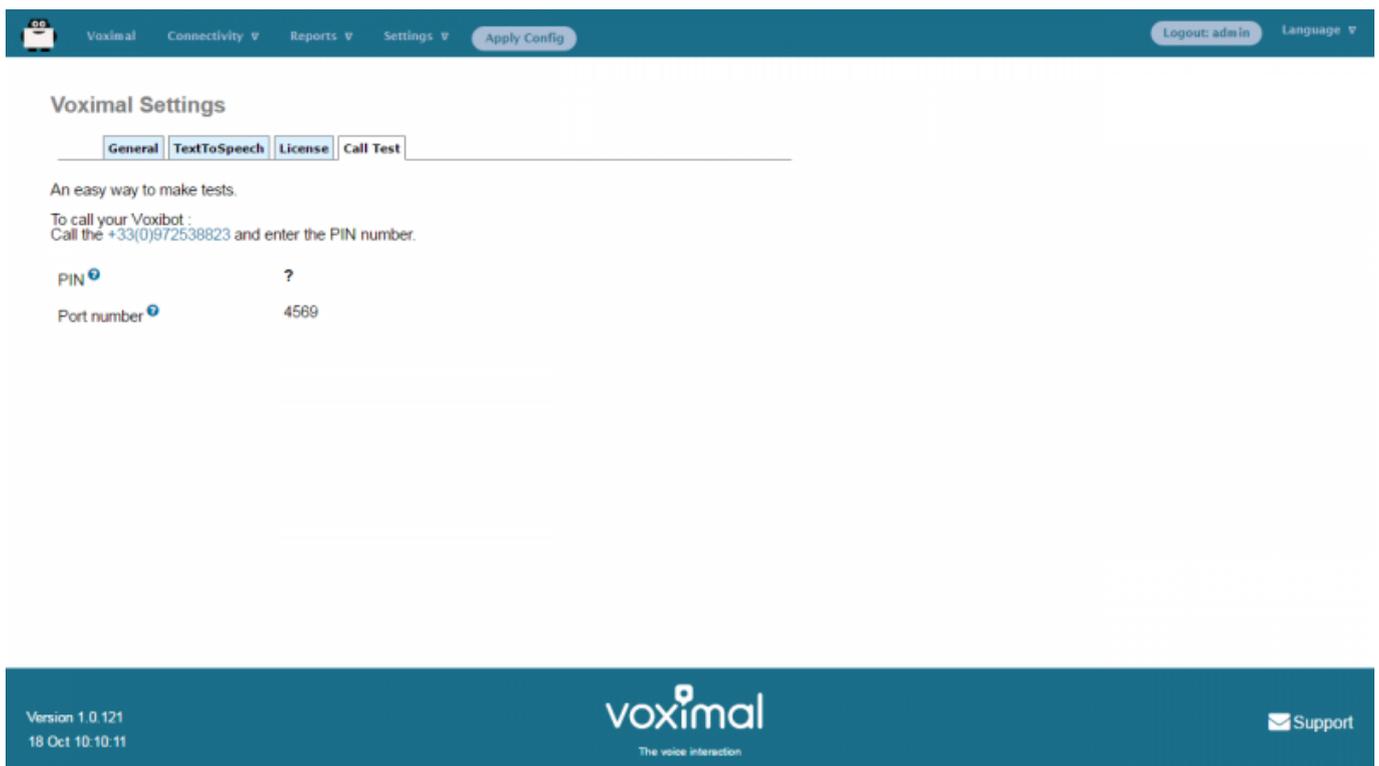

The screenshot shows the Voximal web interface. The top navigation bar includes 'Voximal', 'Connectivity', 'Reports', 'Settings', and 'Apply Config'. The 'Settings' menu is expanded to show 'Voximal Settings'. Under 'Voximal Settings', there are tabs for 'General', 'TextToSpeech', 'License', and 'Call Test'. The 'Call Test' tab is active. The page content includes the text: 'An easy way to make tests. To call your Voxibot : Call the +33(0)972538823 and enter the PIN number.' Below this, there are two input fields: 'PIN' with a question mark and 'Port number' with the value '4569'. The footer of the page shows 'Version 1.0.121', '18 Oct 10:10:11', the 'voximal' logo with the tagline 'The voice interaction', and a 'Support' link.

Get your password from the Asterisk console

Execute :


```
raspbx*CLI> voximal show license
Version      : V14.0
Build
```

```
CVS Revision : $Revision: 1.853 $
Gcc          : V4.9
Arch         : 32 bits
Target       : i686
Asterisk     : V13.11.2
Options sum  :
Date         : Nov  3 2016 21:40:06
Code         : b6de76bcb827eb415eb3b6f75b1001
UID          : cb773b52-a362-11e6-af57-b827eb415eb3
PIN          : 3152
Password     : cb773b52
Key          :
Max sessions : 1
Options
  TextToSpeech : Yes
  Speech       : Yes
State         : ok
```

Your password is : **cb773b52**


IaxLite

- Run IAXLite once you've installed it and enter the credentials for the account on your Voximal. You'll need the IP address of your server and your extension 'user' password.
- Click the **[Set.]** button.
- Fill in the blanks using the IP address of your server, 'user' for your account name, and whatever password got from your Voximal installation server.

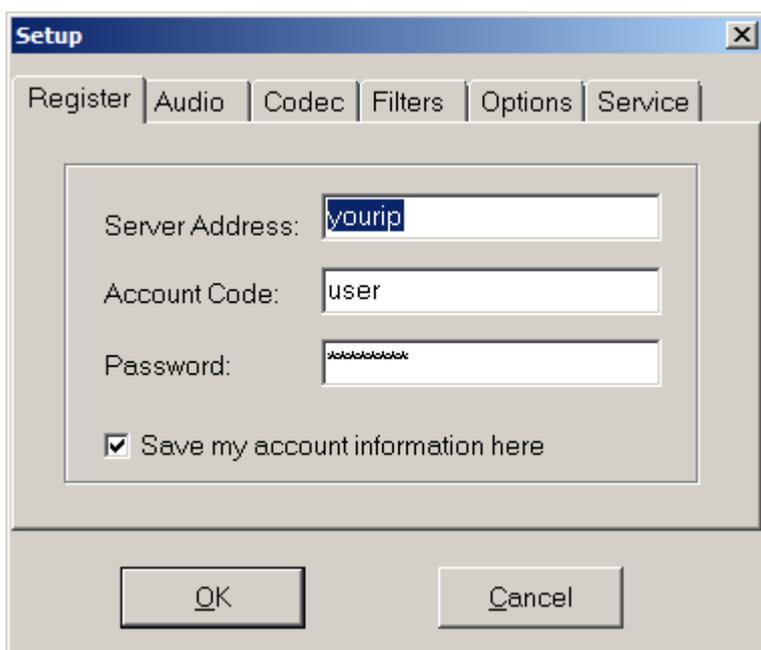

Zoiper

- Run Zoiper once you've installed it and enter the credentials for the account on your Voximal. You'll need the IP address of your server and your extension 'user' password.
- Choose Settings → Accounts and click the **[Create Account]** button.
- Select IAX.
- Fill in the blanks using the IP address of your server, 'user' for your account name, and whatever password got from your Voximal installation server.

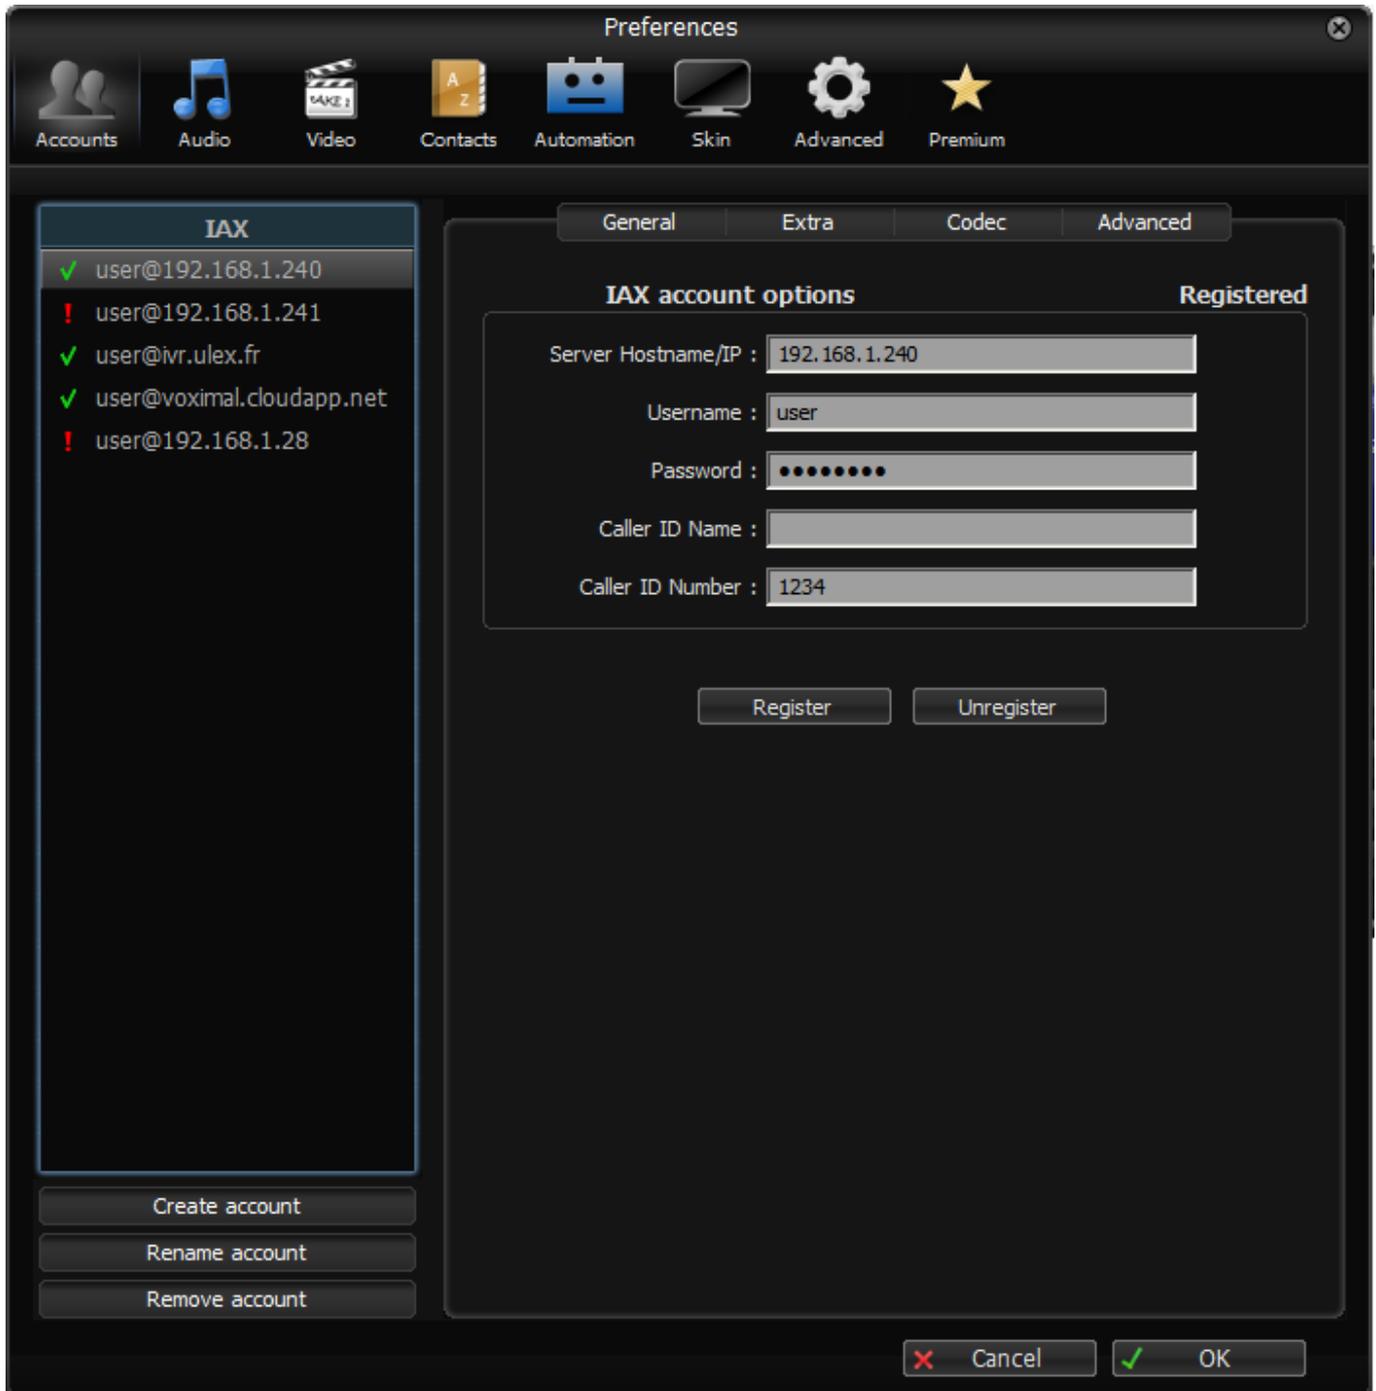

YateClient

- Run YateClient once you've installed it and enter the credentials for the 'user' extension on

Voximal. You'll need the IP address of your server plus your extension user password.

- Choose Settings → Accounts and click the **[New]** button.
- Fill in the blanks using the IP address of your server, 'user' for your account name, and whatever password got from your Voximal installation server.

The screenshot shows a dialog box titled "Edit account: iaxuser@192.168.1.28". It contains the following fields and controls:

- Use provider:** dropdown menu with "-none-" selected.
- Protocol:** dropdown menu with "iax" selected.
- Username:** text input field containing "user".
- Password:** empty text input field.
- Save password:** unchecked checkbox.
- Server:** text input field containing "192.168.1.28".
- Domain:** empty text input field.
- Outbound proxy:** empty text input field.
- Registration Interval:** empty text input field.
- Advanced >>** button.
- Ok** (with green checkmark) and **Cancel** (with red X) buttons.
- ?** help button.

From: <https://wiki.voximal.com/> - **Voximal documentation**

Permanent link: https://wiki.voximal.com/doku.php?id=installation_guide:softphone:start&rev=1525692364

Last update: **2018/05/07 11:26**

