

# Call the test service

You can test your Voximal installation by calling the test numbers from any phone.

We setup 2 phone numbers :

- France : +33(0)9 72 53 88 23
- Unites States : +1-202-600-4534

You need to open the port 4569 from/to the internet. The calls will be transfered by this way to your Voximal server to the number/extension :

- **8965** ('VXML' from your phone dialpad).


By default, the Voximal installation configures the 'helloworld' service/account that executes this VoiceXML document :

- [helloworld.vxml](#)

When you call the voice portal, the service will request your PIN number.

## Get your password from the Web Interface

Select Setting → Voximal Setting → Test

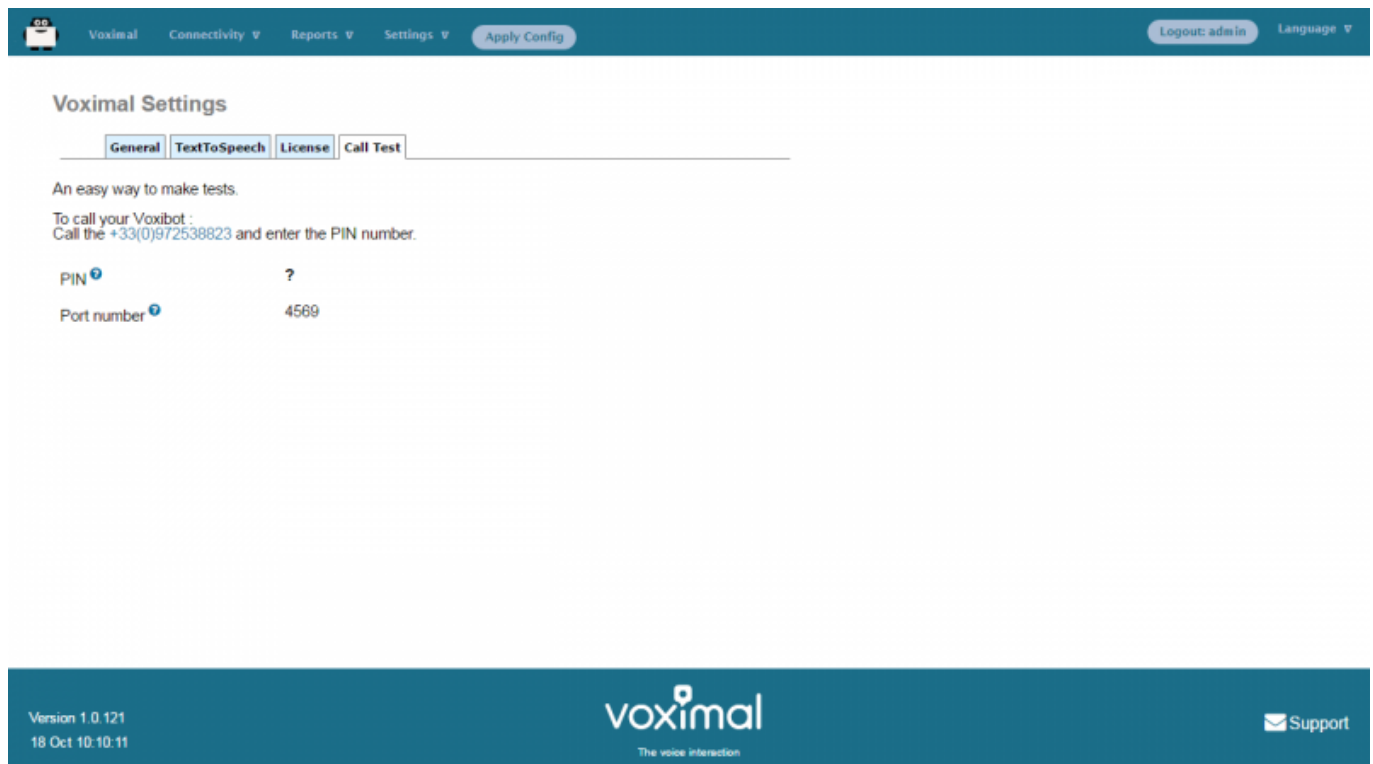

The screenshot shows the Voximal web interface. At the top, there is a navigation bar with a logo, 'Voximal', and menu items: 'Connectivity', 'Reports', 'Settings', and 'Apply Config'. On the right, there is a 'Logout: admin' button and a 'Language' dropdown. Below the navigation bar, the page title is 'Voximal Settings'. There are four tabs: 'General', 'TextToSpeech', 'License', and 'Call Test', with 'Call Test' being the active tab. The main content area contains the following text: 'An easy way to make tests. To call your Voxibot : Call the +33(0)972538823 and enter the PIN number.' Below this text, there are two input fields: 'PIN' with a question mark and a help icon, and 'Port number' with the value '4569' and a help icon. At the bottom of the page, there is a footer with 'Version 1.0.121', '18 Oct 10:10:11', the 'voximal' logo with the tagline 'The voice interaction', and a 'Support' button with an envelope icon.

## Get your password from the Asterisk console

Execute :

```
raspbx*CLI> voximal show license
Version      : V14.0
Build
  CVS Revision : $Revision: 1.853 $
  Gcc          : V4.9
  Arch        : 32 bits
  Target      : i686
  Asterisk    : V13.11.2
  Options sum :
  Date        : Nov  3 2016 21:40:06
Code         : b6de76bcb827eb415eb3b6f75b1001
UID          : cb773b52-a362-11e6-af57-b827eb415eb3
PIN          : 3152
Password     : cb773b52
Key          :
Max sessions : 1
Options
  TextToSpeech : Yes
  Speech       : Yes
State        : ok
```

From:  
<https://wiki.voximal.com/> - **Voximal documentation**

Permanent link:  
[https://wiki.voximal.com/doku.php?id=installation\\_guide:test:start&rev=1478505609](https://wiki.voximal.com/doku.php?id=installation_guide:test:start&rev=1478505609)

Last update: **2016/11/07 08:00**

