

Call the test service

You can test your Voximal installation by calling the test numbers from any phone.

We setup 2 phone numbers :

- France : +33(0)9 72 53 88 23

You need to open the port 4569 from/to the internet. The calls will be transferred by this way to your Voximal server to the number/extension :

- **8965** ('VXML' from your phone dialpad).

By default, the Voximal installation configures the 'helloworld' service/account that executes this VoiceXML document :

- [helloworld.vxml](#)

When you call the voice portal, the service will request your PIN number.

Get your PIN from the Web Interface

With the Voxibot suite, the PIN number is prompted the main panel :

Test : Call +33(0)972 538 823 and enter your PIN XXXX


The screenshot displays the Voximal web interface. The top navigation bar includes 'Voximal', 'Reports', 'Settings', and a 'Logout: admin' button. The main content area is divided into several sections:

- System Overview:** Displays 'Welcome to ip-172-31-40-237' and a test instruction: 'Test : Call +33(0)972 538 823 and enter your PIN 2643'. It includes a 'Summary' section with status indicators for 'Telephony', 'Database', 'Web Server', and 'Interpreter'. A 'System Alerts' box shows 'No critical issues found'. A message at the bottom states 'There are 2 bad destinations'.
- Uptime:** Shows 'System Last Rebooted' at '10 hours, 22 minutes, 37 seconds, ago' and 'Load Averages' for 1, 5, and 15 minutes.
- Telephony Statistics:** A chart showing 'Trunks Reged', 'Trunks Offline', and 'Active Calls' over time.
- Interpreter Statistics:** Includes 'Sessions Status' (Pending: 0, Peak: 0) and 'Average Counters' (Duration: 4.00, Response: 1.00, CAPS: 0.00).

The footer contains 'Version 1.0.117', '7 Nov 21:11:28', the 'voximal' logo with 'The voice interaction' tagline, and a 'Support' button. A system information box in the bottom right corner shows 'Window size: 1272 x 712' and 'Viewport size: 1280 x 720'.

With standard FreePBX distribution :

- Select Setting → Voximal Setting → Test

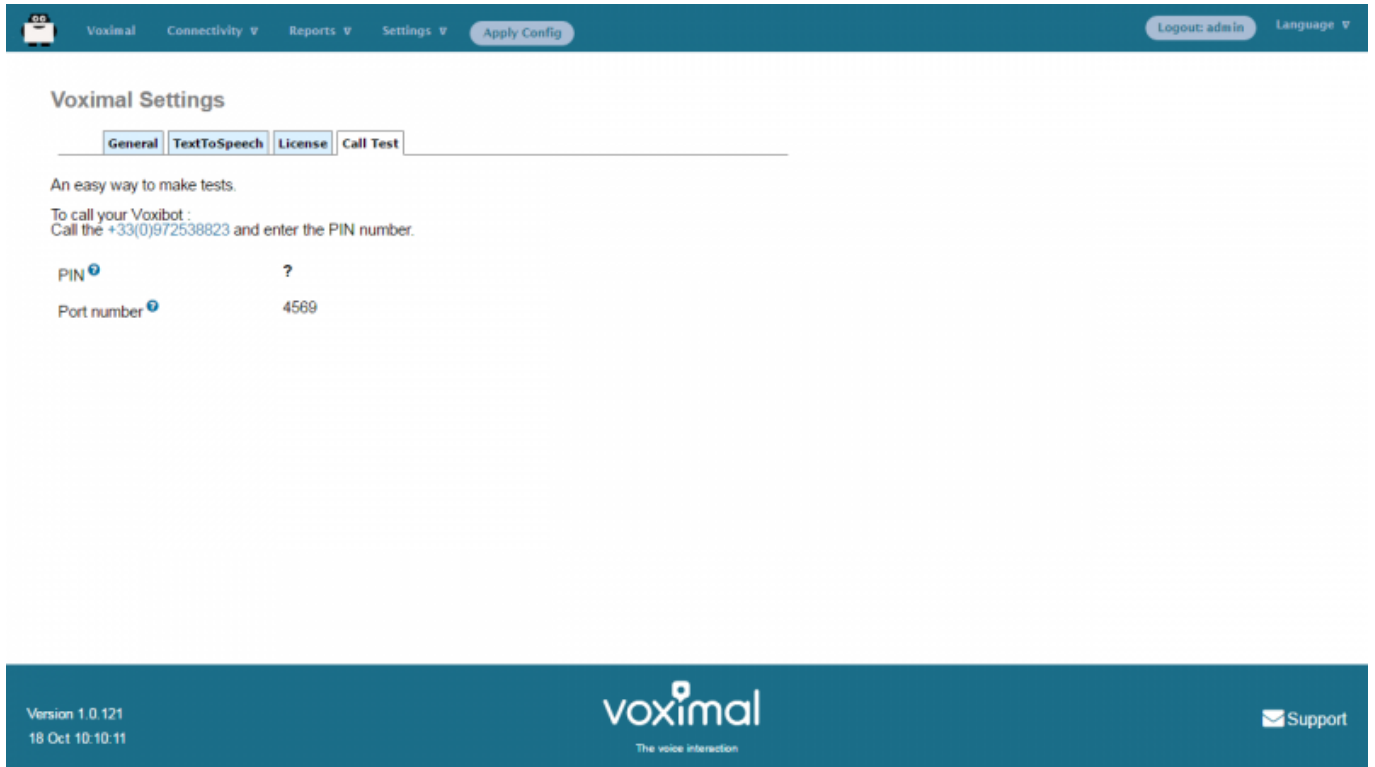

Get your PIN from the Asterisk console

Execute :

```
raspbx*CLI> voximal show license
Version      : V14.0
Build
  CVS Revision : $Revision: 1.853 $
  Gcc          : V4.9
  Arch         : 32 bits
  Target       : i686
  Asterisk     : V13.11.2
  Options sum  :
  Date         : Nov  3 2016 21:40:06
  Code         : b6de76bcb827eb415eb3b6f75b1001
  UID         : cb773b52-a362-11e6-af57-b827eb415eb3
  PIN         : 3152
  Password    : cb773b52
  Key         :
  Max sessions : 1
  Options
    TextToSpeech : Yes
    Speech       : Yes
  State       : ok
```

Your PIN is : **3152** (in this example)

From:
<https://wiki.voximal.com/> - **Voximal documentation**

Permanent link:
https://wiki.voximal.com/doku.php?id=installation_guide:test:start&rev=1484817220

Last update: **2017/01/19 09:13**

